


Written By: Ryan




Step 1 — Cover

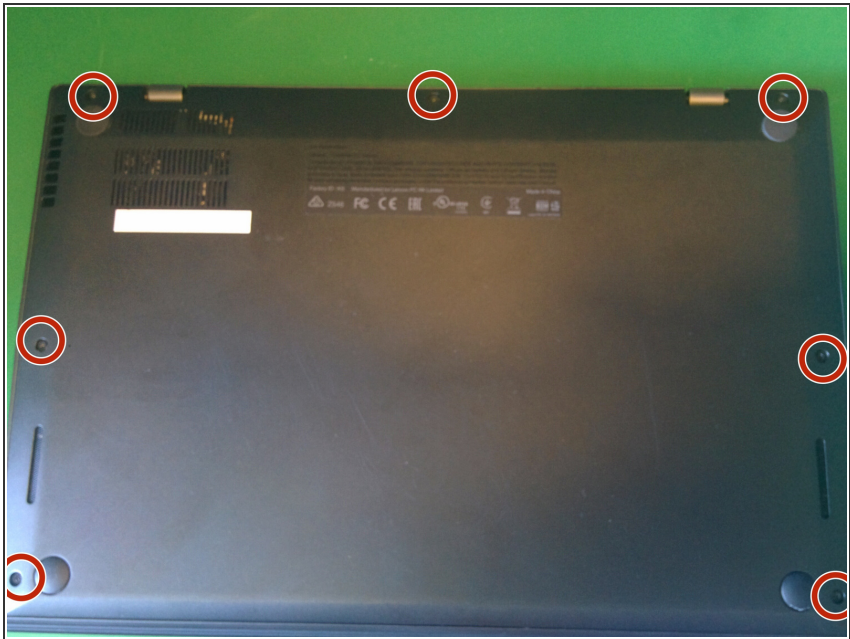


- Remove the 7 philips head screws from the back.
- Lift off back cover.

Step 2 — Battery Disconnection

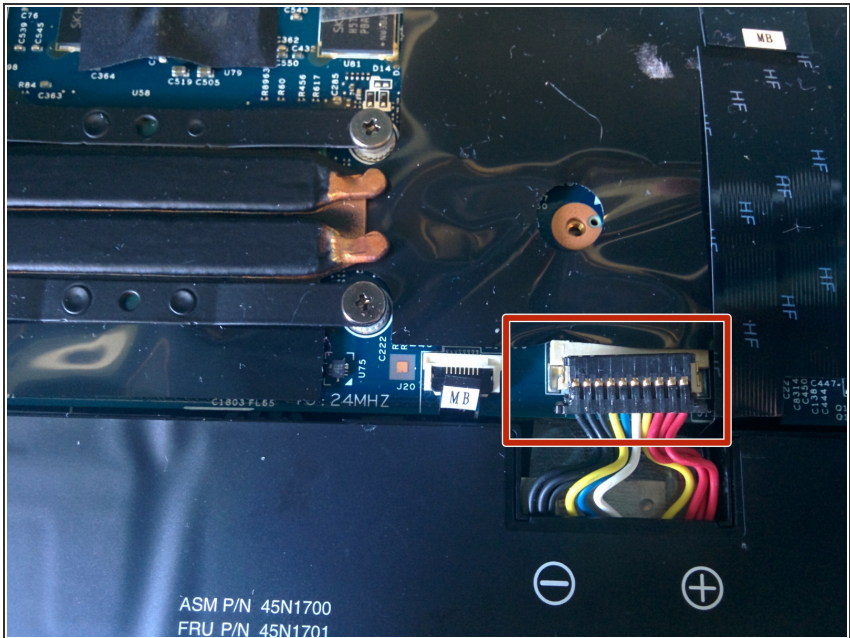

- Using a plastic pry tool disconnect the battery from the motherboard.

Step 3 — NGFF Wireless and M.2 SSD Cards

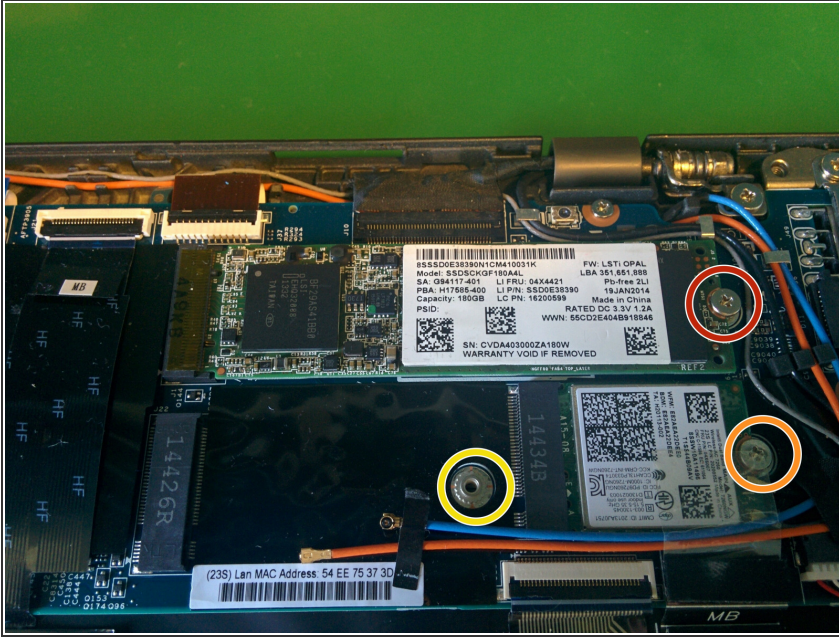

- Remove the phillips screw and remove the M.2 SSD from the motherboard. (Intel® SSD 530 Series - SSDSCKGF180A4L)
- Remove the phillips screw from the NGFF WiFi card and remove . (7260NGW Intel® Dual Band Wireless-AC)
- If present also remove any cards from the second NGFF port.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-29 02:44:04 PM.